



HIGH PERFORMANCE METALS  
FOR RACING APPLICATIONS

---



# SPECIAL MATERIALS FOR WINNERS

## FASTER, LIGHTER, STRONGER –

terms of our time which must be taken literally, especially in the racing industry. Fulfilling these requirements demands everything of materials. BÖHLER provides the materials that racing engineers need – in the grade and dimension they want.

Each and every step of production – from melting to delivery – is in our own hands and means the highest, most consistent quality for you. This is why BÖHLER is one of the most reliable partners for the racing industry.



## No limits, high performance materials for

- » Formula 1
- » Indycar Series
- » DTM
- » CART
- » Rally Cars
- » Motor Cycles

## Applications

- » Gears
- » Crankshafts
- » Driveshafts
- » Bearings
- » Conrods
- » Camshafts
- » Differentials




## **BÖHLER UNLIMITED**

With the UNLIMITED series BÖHLER offers optimised as well as newly developed material solutions designed for demanding Racing applications. One example would be our BÖHLER W460 UNLIMITED which is optimised to an outstanding fatigue strength and balanced mechanical properties.


Find out more details about our UNLIMITED portfolio within this brochure (Page 6) or contact one of our material experts.

# TRENDSETTING TECHNOLOGIES FOR HIGHEST METALLURGICAL PERFORMANCE

## FLOW OF MATERIAL

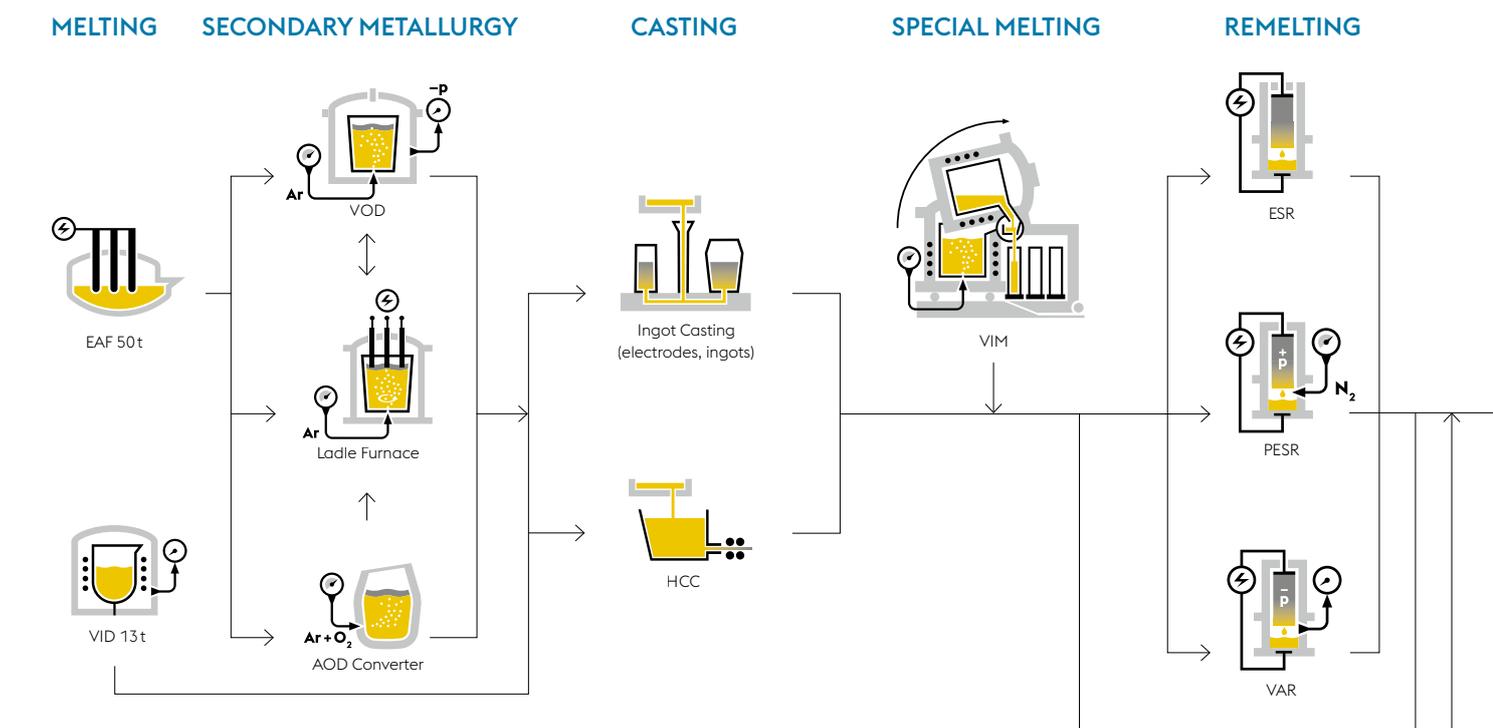

## POWDER METALLURGY

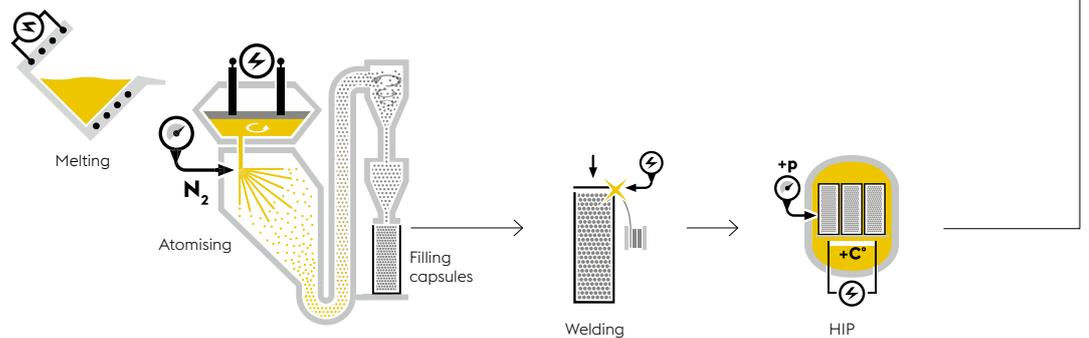


ROLLING AND FORGING

HEAT TREATMENT


MACHINING

TESTING

DISPATCH

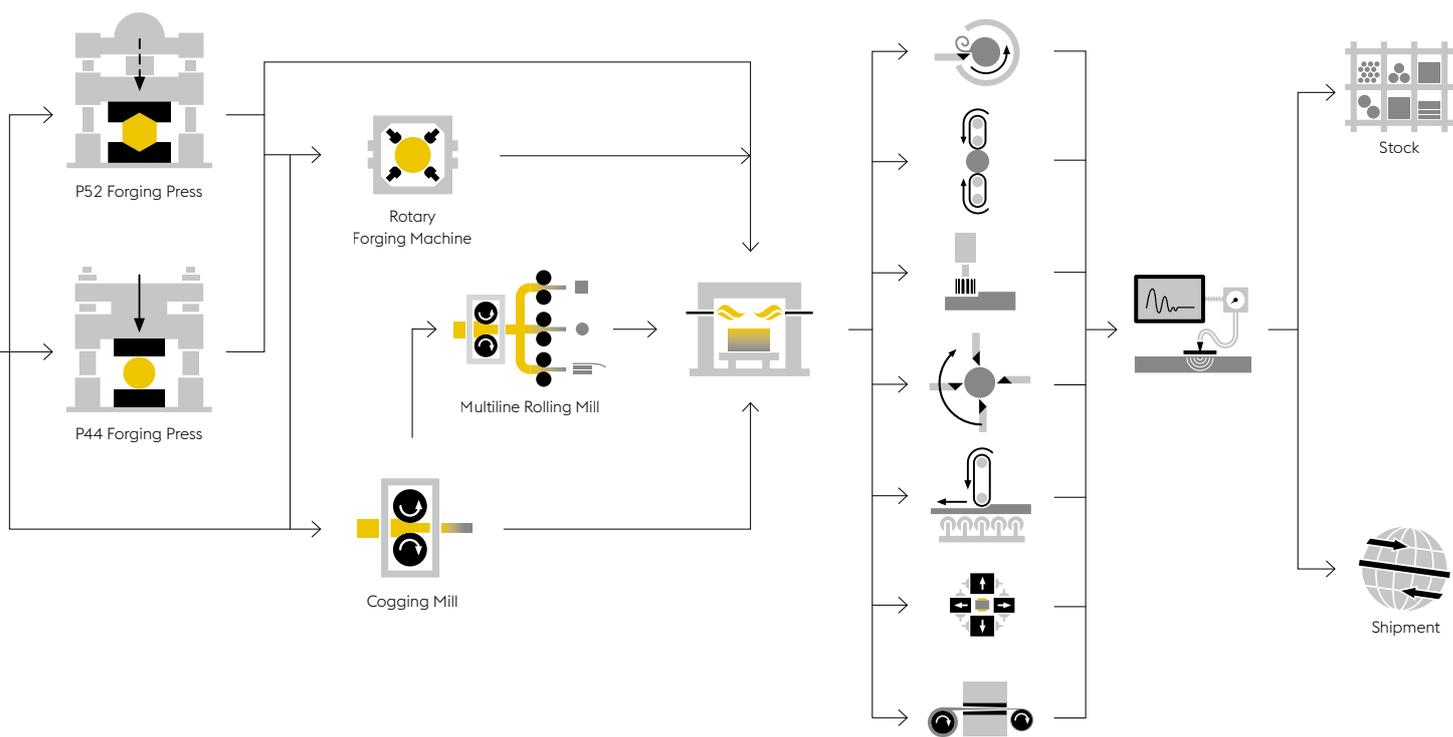

AMPO

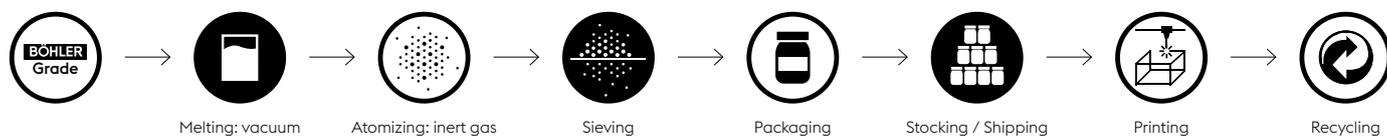

# THE QUALITY OF YOUR COMPONENTS STARTS HERE

A wide variety of possibilities when it comes to the machining and finishing of long products allows us to dedicate ourselves to customer requirements individually and rapidly in the BÖHLER service tradition.


Rolled bar steel is put through a heat treatment and machined, finished and tested according to customer specifications.

BÖHLER endeavours to fulfil every customer request regarding surface treatment: bar steel, round-peeled, peeled and polished, continuously ground or turned; machined at both ends upon request; bar steel, flat milled and cut to large-scale flat dimensions. In the BÖHLER tolerance range you require.



## For example:

IBO ECOMAX	bar steel, peeled
ECOBLANK	bright steel, peeled and polished, decarb-free
ECOFINISH	bright steel, band ground
BRIGHT STEEL	ground and polished

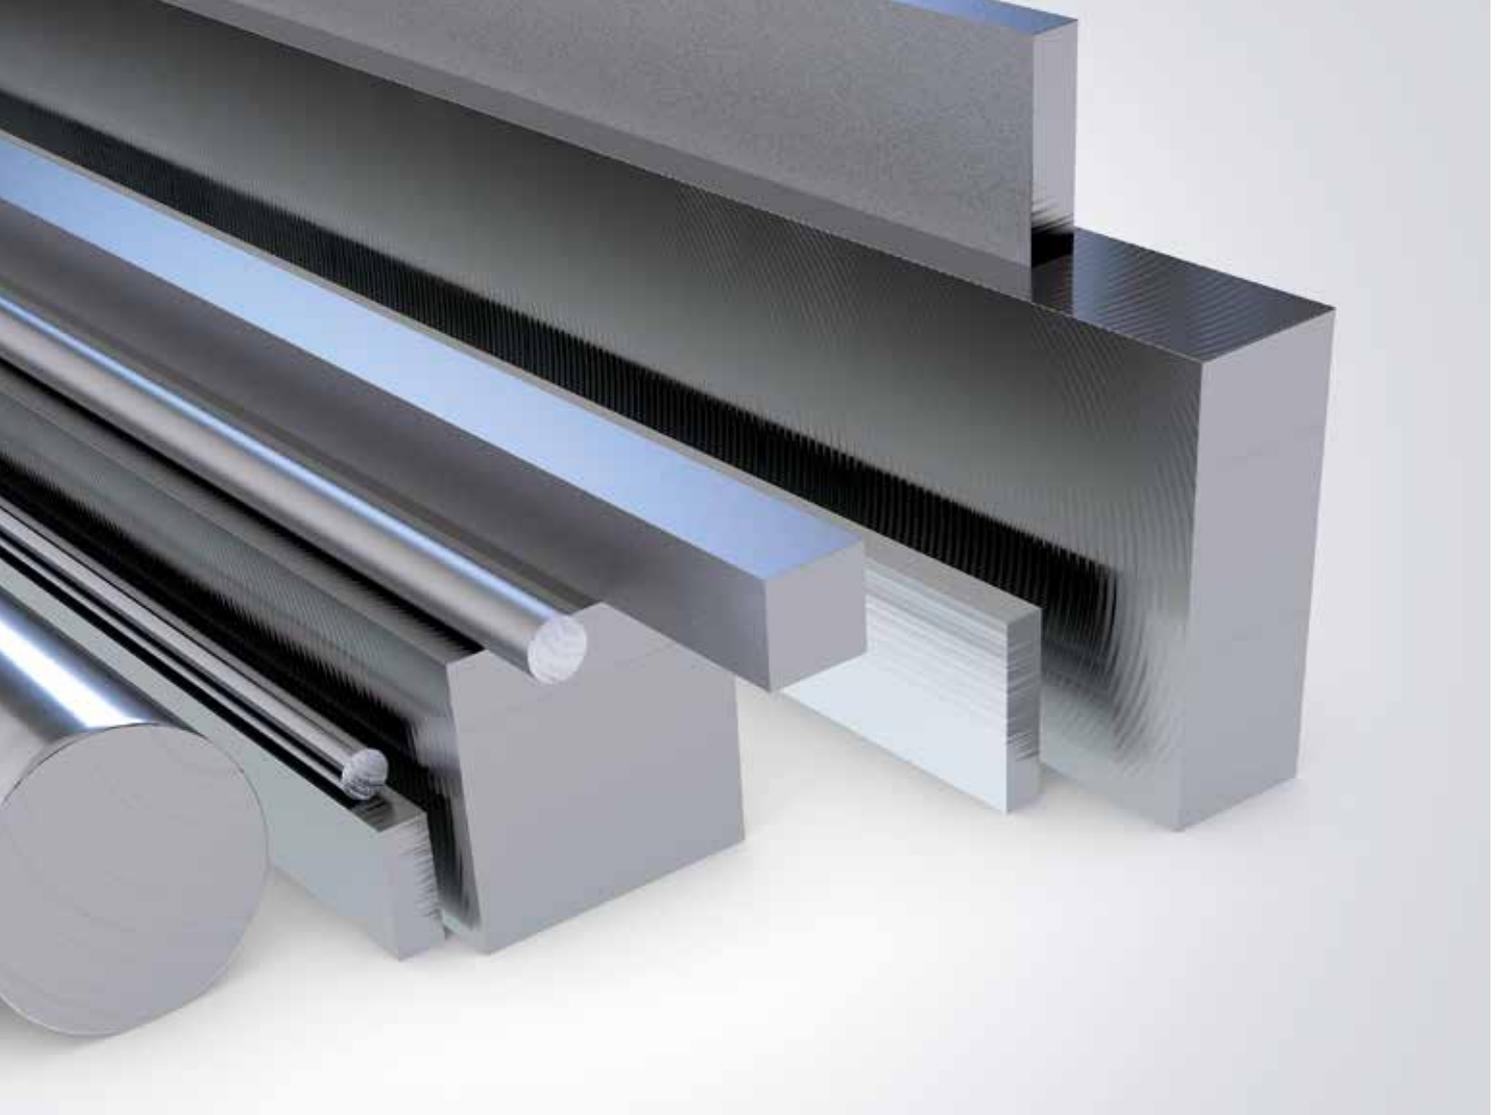

#### **BARS rolled**

round: 12.5 – 150 mm  
 square: 15 – 150 mm  
 flat:       width           thickness  
           15 – 60 mm   5 – 41 mm  
           60 – 200 mm 5 – 86 mm  
           100 – 300 mm 15 – 80 mm

#### **ROLLED WIRE**

rolled:   dia. 5.0 – 13.5 mm  
 drawn:   dia. 1.0 – 12.0 mm  
 precision shaped:  
           round 1   – 28 mm  
           flat 0.5 – 40mm<sup>2</sup>

#### **BARS forged**

round, square: 100 – 1200 mm  
 flat:   width   thickness  
           1600   1000 mm maximum  
 Ratio width/thickness maximum 10:1

#### **BARS pre-machined**

IBO ECOMAX12.5 – 425 mm  
 (on request up to 900 mm)

# A WIDE RANGE OF GRADES

BÖHLER grade	Market grade	Melting route	AMS	BS	Others	Chemical composition in %											
						C	Si	Mn	Cr	Mo	Ni	V	W	Co	Ti	Al	Others
<b>HEAT TREATABLE STEELS</b>																	
<b>BÖHLER V124SC</b>	4340	(P)ESR-VMR	6414	-	1.6944 ~ 40NiCrMo6	0.42	0.30	0.80	0.85	0.30	1.90	0.08	-	-	-	0.03	-
<b>BÖHLER V132</b>	300M	VMR	6257 6419	S155	SAE 4340M	0.42	1.65	0.80	0.80	0.40	1.80	0.08	-	-	-	-	-
<b>BÖHLER V145</b>	30CDN8	Airmelted	-	-	1.6604 30CrNiMo8	0.30	0.30	0.50	2.00	0.35	2.00	-	-	-	-	-	-
<b>BÖHLER V180 UNLIMITED</b>	-	VMR	-	-	-	0.41	2.70	0.70	0.85	0.45	1.80	0.21	-	-	-	-	-
<b>BÖHLER V358</b>	E40CDV12	(P)ESR-VMR	-	S132	1.8523	0.41	0.28	0.65	3.35	0.95	-	0.20	-	-	-	-	-
<b>BÖHLER V361</b>	E32CDV13	(P)ESR-VMR	6481	-	1.7765	0.33	0.28	0.50	3.00	1.00	-	0.25	-	-	0.033	-	-
<b>BÖHLER M201</b>	-	Airmelted	-	-	1.2311	0.41	0.30	1.50	2.00	0.20	-	-	-	-	-	-	-
<b>BÖHLER M238</b>	-	Airmelted	-	-	1.2738	0.38	0.30	1.50	2.00	0.20	1.10	-	-	-	-	-	-
<b>BÖHLER M268</b>	-	VMR	-	-	1.2738	0.38	0.30	1.50	-	-	-	-	-	-	-	-	-
<b>BÖHLER W360</b>	-	(P)ESR	-	-	-	0.50	0.20	0.25	4.50	3.00	-	0.60	-	-	-	-	-
<b>BÖHLER W460 UNLIMITED</b>	-	VMR	-	-	-	0.50	0.20	0.45	4.55	3.00	-	0.75	-	-	-	-	-
<b>BÖHLER W400</b>	-	VMR	~ H11	~ BH11	-	0.37	0.20	0.30	5.00	1.30	-	0.50	-	-	-	-	-
<b>BÖHLER K600</b>	-	Airmelted	-	-	1.2767	0.48	0.25	0.40	1.30	0.25	4.00	-	-	-	-	-	-
<b>CASE CARBURISING STEELS</b>																	
<b>BÖHLER E108</b>	-	Airmelted- (P)ESR-VMR	-	S156	1.6722	0.17	0.28	0.80	0.70	0.25	4.10	-	-	-	-	-	-
<b>BÖHLER M100</b>	-	Airmelted	-	-	20MnCr5	0.20	0.28	1.20	1.10	-	-	-	-	-	-	-	-
<b>BÖHLER M121</b>	-	(P)ESR	-	-	EN36C	0.14	0.28	0.55	0.90	0.13	3.15	-	-	-	-	-	-
<b>BÖHLER M130</b>	-	Airmelted	-	-	EN39	0.19	0.23	0.30	1.25	0.20	4.05	-	-	-	-	-	-
<b>PH GRADES (STAINLESS STEELS)</b>																	
<b>BÖHLER N700</b>	17-4 PH	Airmelted- (P)ESR-VMR	5643 5622	-	1.4542 1.4548	0.04	0.25	0.40	15.28	-	4.50	-	-	-	-	-	Cu: 3.25 Nb: 0.30
<b>BÖHLER N701</b>	15-5 PH	Airmelted- (P)ESR	5659	-	1.4545	0.035	0.28	0.60	14.88	-	5.15	-	-	-	-	-	Cu: 3.30 Nb: 0.30
<b>BÖHLER N709</b>	13-8 Mo	VMR	5629	-	1.4534	0.03	-	-	12.45	2.18	8.15	-	-	-	-	1.06	-

BÖHLER grade	Market grade	Melting route	AMS	BS	Others	Chemical composition in %											
						C	Si	Mn	Cr	Mo	Ni	V	W	Co	Ti	Al	Others
<b>BÖHLER</b> N360	X30	(P)ESR	5898	-	1.4108 X30CrMoN15-1	0.32	0.55	0.45	15.00	1.03	-	0.045	-	-	-	-	-
<b>BÖHLER</b> N695	440C	Airmelted- VMR	5618 5630	-	1.3544 X105CrMo17 S102CrMo17	1.05	0.40	0.40	16.70	0.50	-	-	-	-	-	-	-
<b>BÖHLER</b> R250	M50	VMR	6491	-	~ 1.3551	0.83	0.18	0.28	4.13	4.30	-	1.05	-	-	-	-	-
<b>BÖHLER</b> R350	M50 Nil	VMR	6278	-	-	0.14	0.18	0.28	4.15	4.25	3.50	1.23	-	-	-	-	-
<b>BÖHLER</b> V1245C	4340	(P)ESR-VMR	6414	-	1.6944 ~ 40NiCrMo6 EN24 VAR	0.42	0.30	0.80	0.85	0.30	1.90	0.08	-	-	-	0.03	-

#### MARAGING STEELS

<b>BÖHLER</b> V720	Maraging 300	VMR	6514	-	1.6354	≤ 0.005	≤0.05	≤0.05	-	5.00	18.50	-	-	8.80	0.70	0.10	-
<b>BÖHLER</b> V723	Maraging 250	VMR	6512	S162	1.6359	-	-	-	-	4.90	-	-	-	7.80	0.40	0.13	-

#### PM PRODUCTION

<b>BÖHLER</b> K490 MICROCLEAN	-	-	-	-	-	1.40	-	-	6.40	1.50	-	3.70	3.50	-	-	-	-	+ Nb
<b>BÖHLER</b> M390 MICROCLEAN	-	-	-	-	-	1.91	0.60	0.30	20.0	1.00	-	4.00	0.60	-	-	-	-	N: 0.24
<b>BÖHLER</b> S290 MICROCLEAN	-	-	-	-	-	2.00	-	-	3.80	2.50	-	5.10	14.30	11.00	-	-	-	-
<b>BÖHLER</b> S390 MICROCLEAN	-	-	-	-	-	1.64	-	-	3.80	2.00	-	4.80	10.40	8.00	-	-	-	-
<b>BÖHLER</b> S590 MICROCLEAN	-	-	-	-	-	1.29	-	-	4.20	5.00	-	3.00	6.30	8.40	-	-	-	-
<b>BÖHLER</b> S690 UNLIMITED	-	-	-	-	-	1.35	-	-	4.10	5.00	-	4.10	5.90	-	-	-	-	-
<b>BÖHLER</b> S790 MICROCLEAN	-	-	-	-	-	1.29	-	-	4.20	5.00	-	3.00	6.30	-	-	-	-	-

BÖHLER grade	Market grade	Melting route	AMS	Others	Chemical composition in %													
					C	Si	Mn	Cr	Mo	Ni	V	W	Co	Ti	Al	Nb	Cu	Others
<b>BÖHLER</b> L718	Alloy 718	VMR	5662 5663	2.4668	0.08	0.35	0.35	17- 21	2.8- 3.3	50- 55	-	-	1.0	0.65- 1.15	0.2- 0.8	4.75- 5.5	0.3	P: 0.015 S: 0.015 Fe: Rem B: 0.006 Pb: 5ppm Bi: 0.3 ppm Se: 3ppm
<b>BÖHLER</b> L625	Alloy 625	VMR	5666	2.4856 N06625	0.045	-	-	15.00	-	74.00	-	-	-	2.40	1.23	0.95	-	-
<b>BÖHLER</b> T200	A286	(P)ESR	5731 5732	Z6NCZ25 1.4933 1.4944	≤0.06	-	-	21.00	8.50	63.90	-	-	≤1.00	≤0.04	0.18	3.40	<3.00	-



# BÖHLER **AMPO** POWDER TO PRINT YOUR DREAMS

We as BÖHLER offer powders with the right properties for every application and printing technology. In our global development and testing center we produce test objects with 3D printing in order to acquire experience and explore new application areas for additive manufacturing.

BÖHLER AMPO grade	nominally 15 to 45µm, 45 to 90µm, or according to customer requirements Titanium: 20 to 63 µm, or according to customer requirements			Apparent density** [g/cm <sup>3</sup> ]
	Particle size distribution* D10 [µm]	D50 [µm]	D90 [µm]	
<b>BÖHLER E185 AMPO</b>	18-24	29-35	42-50	≥ 3.5
<b>BÖHLER M789 AMPO</b>	18-24	29-35	42-50	≥ 3.5
<b>BÖHLER W360 AMPO</b>	18-24	29-35	42-50	≥ 3.6
<b>BÖHLER N700 AMPO</b>	18-24	29-35	42-50	≥ 3.4
<b>BÖHLER L718 AMPO</b>	18-24	29-35	42-50	≥ 3.5
<b>BÖHLER Ti64Gd.5 AMPO</b>	18-24	31-41	53-67	≥ 2.0
<b>BÖHLER Ti64Gd.23 AMPO</b>	18-24	31-41	53-67	≥ 2.0

\* Measurement of the particle size distribution according to ISO 13322-2 (Dynamic image analysis methods);

\*\* The apparent density measurement is based on ASTM B417 and ASTM B212 and relates to typical measured values.



The use of up-to-date measuring technology and investment in new methods is important to us.



Vacuum induction melting and atomization under inert gas ensure the highest possible metallurgical purity of the powder.



In our test laboratory, we rely on qualified and carefully trained staff.

<b>BÖHLER E185</b> <b>AMPO</b>	Patent pending									
Chemical composition [wt. %]	<b>Element</b>	<b>C</b>	<b>Si</b>	<b>Mn</b>	<b>Cr</b>	<b>Ni</b>	<b>Mo</b>	<b>V</b>	<b>Co-free*</b>	
	<b>Mass - %</b>	0.19	0.22	0.30	0.95	1.25	0.20	0.15		
<b>BÖHLER M789</b> <b>AMPO</b>	Patent									
Chemical composition [wt. %]	<b>Element</b>	<b>C</b>	<b>Cr</b>	<b>Mo</b>	<b>Ni</b>	<b>Ti</b>	<b>Al</b>	<b>Co-free*</b>		
	<b>Mass - %</b>	≤ 0.02	12.20	1.00	10.00	1.00	0.60			
<b>BÖHLER W360</b> <b>AMPO</b>	Patent									
Chemical composition [wt. %]	<b>Element</b>	<b>C</b>	<b>Si</b>	<b>Mn</b>	<b>Cr</b>	<b>Mo</b>	<b>V</b>	<b>Co-free*</b> <b>Ni-free**</b>		
	<b>Mass - %</b>	0.50	0.20	0.25	4.50	3.00	0.55			
<b>BÖHLER N700</b> <b>AMPO</b>	DIN 1.4542 / 17-4PH / UNS S17400 (chemistry of AMS 5643 respectively AMS 5622)									
Chemical composition [wt. %]	<b>Element</b>	<b>C</b>	<b>Cr</b>	<b>Ni</b>	<b>Cu</b>	<b>Nb</b>				
	<b>Mass - %</b>	0.04	16.25	4.00	4.00	0.34				
<b>BÖHLER L718</b> <b>AMPO</b>	DIN 2.4668 / UNS N07718 (upon request chemistry according to API Std. 6ACRA or AMS 5662 respectively AMS 5663 possible)									
Chemical composition [wt. %]	<b>Element</b>	<b>C</b>	<b>Cr</b>	<b>Mo</b>	<b>Ni</b>	<b>Ti</b>	<b>Al</b>	<b>Nb</b>	<b>B</b>	<b>Fe</b>
	<b>Mass - %</b>	0.04	19.00	3.05	52.50	0.90	0.50	5.13	0.004	Balance
<b>BÖHLER Ti64Gd.5</b> <b>AMPO</b>	3.7164 (3.7165) UNS 56400									
Chemical composition [wt. %]	<b>Element</b>	<b>C</b>	<b>Ti</b>	<b>Al</b>	<b>V</b>	<b>Fe</b>	<b>O</b>	<b>N</b>	<b>H</b>	<b>Y</b>
	<b>Mass - %</b>	≤ 0.08	> 87.00	6.13	4.00	≤ 0.30	≤ 0.20	≤ 0.05	≤ 0.02	≤ 0.01
<b>BÖHLER Ti64Gd.23</b> <b>AMPO</b>	3.7165 (3.7164) UNS 56407									
Chemical composition [wt. %]	<b>Element</b>	<b>C</b>	<b>Ti</b>	<b>Al</b>	<b>V</b>	<b>Fe</b>	<b>O</b>	<b>N</b>	<b>H</b>	<b>Y</b>
	<b>Mass - %</b>	≤ 0.08	> 87.00	6.00	4.00	≤ 0.25	≤ 0.13	≤ 0.05	≤ 0.01	≤ 0.01
<b>Order quantity</b>	10 kg minimum									*Co-content ≤ 0.1%
<b>Particle size distribution</b>	Nominal 15 to 45 µm, 45 to 90 µm, or customized after request Titanium: 20 to 63 µm, or customized after request									**Ni-content ≤ 0.1%

# YOU CAN TRUST OUR SPECIALISTS

YOU'VE GOT THE IDEAS AND WE'VE GOT THE SOLUTIONS. ANY PROBLEM THAT ARISES, ANY CUSTOMER REQUIREMENT AT HAND MEANS NEW ANSWERS TO BE FOUND, FOR OVER 100 YEARS NOW. THIS KNOW-HOW IS AVAILABLE TO YOU, WHETHER AS SUPPORT FOR MATERIALS OR AS APPLICATIONS. TECHNICAL CONSULTING IS OUR SUPREME DISCIPLINE AND YOU AS OUR PARTNER CAN CERTAINLY BENEFIT FROM IT.

---

## **Our services include:**

---

On-going responsibility for quality  
(from the inquiry to issuing the certificate)

---

Technical interface between the customer  
(sales, marketing, ...) and the production

---

Technical request handling

---

Technical order processing/inspection/monitoring

---

Product certification (issuing certificates)

---

Product and process approvals/qualifications

---

Continuous product optimization throughout the entire  
production process

---

Technical customer advisory service/ applications  
engineering

---

Technical trainings

---

Process optimization and development

---

Central coordination of testing activities

---







# FORMS OF SUPPLY AND AVAILABILITY

## PROMPT AVAILABILITY

Having a professional partner is vital, especially in the field of power industry engineering. In order to be able to fulfill the demands of our customers in terms of time and quantity, we are able to offer special storage options at several locations.

### **Austria:**

**voestalpine BÖHLER Edelstahl GmbH & Co KG**  
Mariazeller Straße 25, 8605 Kapfenberg, Austria  
P. +43/3862/20-0  
E. [automotive@bohler-edelstahl.at](mailto:automotive@bohler-edelstahl.at)  
[www.voestalpine.com/bohler-edelstahl](http://www.voestalpine.com/bohler-edelstahl)

### **United Kingdom:**

**voestalpine High Performance Metals UK Ltd.**  
European Business Park, Taylors Lane, Oldbury B69 2BN  
P. +44(0)121 552 2575  
E. [ukinfo@voestalpine.com](mailto:ukinfo@voestalpine.com)  
[www.voestalpine.com/highperformancemetals/uk/en/](http://www.voestalpine.com/highperformancemetals/uk/en/)



The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.



**voestalpine BÖHLER Edelstahl GmbH & Co KG**

Mariazeller Straße 25

8605 Kapfenberg, Austria

T. +43/50304/20-0

E. [info@bohler-edelstahl.at](mailto:info@bohler-edelstahl.at)

[www.voestalpine.com/bohler-edelstahl](http://www.voestalpine.com/bohler-edelstahl)

**voestalpine**

ONE STEP AHEAD.